


UCM

Universal Communication Module



The Universal Communications Module (**UCM**) provides a full-featured communications gateway between your Blue Sky Energy IPN Network and the web. If you have a single IPN-compatible charge controller, or are operating a full, eight controller network, the UCM helps you monitor your system from anywhere. The UCM provides interfaces for RS485 and TCP/IP Ethernet communication based on Modbus protocol. A built-in HTTP web server allows users to view data and set system parameters via their browser from wherever they are online, without a subscription. Keep track of your system performance with 128 days of datalogging over key performance parameters. Download the data in Excel format or take the UCM with you for filed download and analysis.

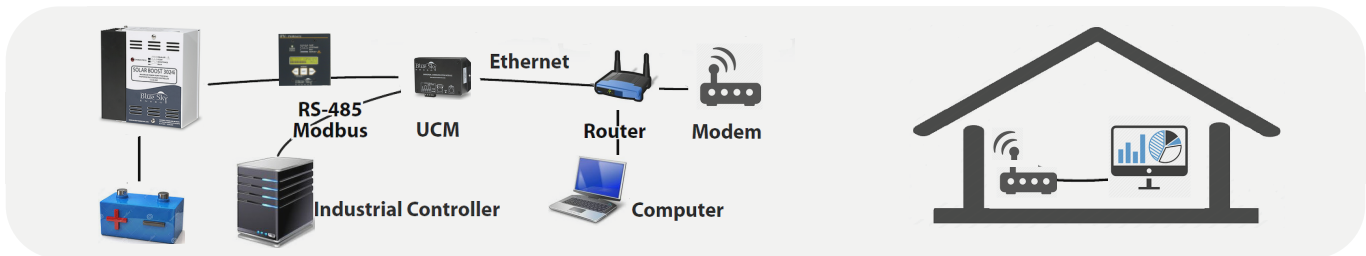

Product features

- Standard Modbus RTU via RS485 and Modbus/IP
- TCP/IP connection and embedded Ethernet HTTP web site server
- Resists corrosion with conformal coating

System monitoring


- Periodic HTTP data upload to remote server
- 128 days of system Performance datalogging available as downloadable Excel file
- The datalog file provides all the information received from IPN display network (IPN ProRemote or IPN Remote)

Compatibility

- Single or multiple Charge Controller on an IPN network with or without IPN ProRemote and IPN Remote.

Warranty

- Full 5 Year Limited Warranty

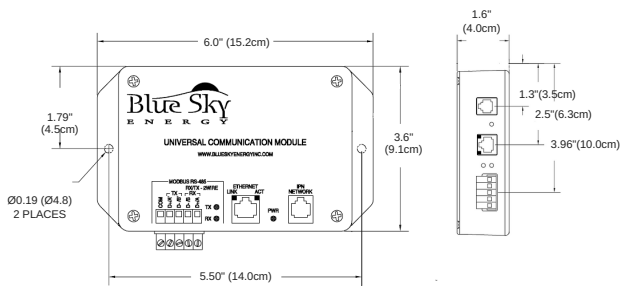

UCM	
Specifications	
Power Consumption	0.9W provided by charge controller
IPN Network	RJ-11 Phone jack, 7' (2.1m) 4-wire swap cable
Ethernet	Standard Ethernet TCP/IP 10Mbps, RJ-45 connector 3'(0.9m)
Modbus	Standard Modbus RTU, slave address 1-247 via RS-485 or Modbus/IP
FTP Upload	Up to 33 key performance parameters for up to 128 days. Datalog downloadable on Excel file
HTTP Web Site Driver	Delivers HTTP web site for data view, parameter setup and data log file download to two locations simultaneously. Web site via router or LAN. Directly connection to PC via CAT5 crossover cable.
Datalogging	Communication via 4-pin telephone cable length to 500' (152m). Current shunt via twisted pair cable length to 300' (91m) Datalog includes Min & Max bat voltage, Time in Accp & Float, Max bat discharge current, Min & Max bat AH from full, Max total PV output current, Total PV output AH. Plus for each individual controller; Max PV voltage, Max PV output current, and Total PV output Ah.
Operation Conditions	
Environmental	-40 to +50°C
Mechanical	
Degree of Protection	IP30
Dimension (X,Y,Z)	(6.0, 3.6, 1.6)" (15.2, 9.1, 4.0)cm
Weight	0.39lb (178g)